

Indra Smart LUX™

Product Brochure

Introducing the world's slimmest EV charger




Introducing the Indra Smart LUX™

7.4kW Smart EV Charger

The Indra Smart LUX™ is the smartest way to charge your electric vehicle. Packed with intelligent features, slim and compact design and accompanied by the intuitive Indra App, the Smart LUX™ not only helps you charge your EV at the optimum tariff, but it also enables you to ensure your vehicle is available when you need it.

The Indra Smart LUX™ has the highest level of protection against water and dust on the market (IP67). The Indra Smart LUX™ also has class-leading impact resistance (IK10).

Smart LUX™ is inspired by the Latin word for light, and this is most clearly expressed in the eye-catching Turbine Lights. A unique light sequence provides a welcoming handshake and communicates the charger's status.

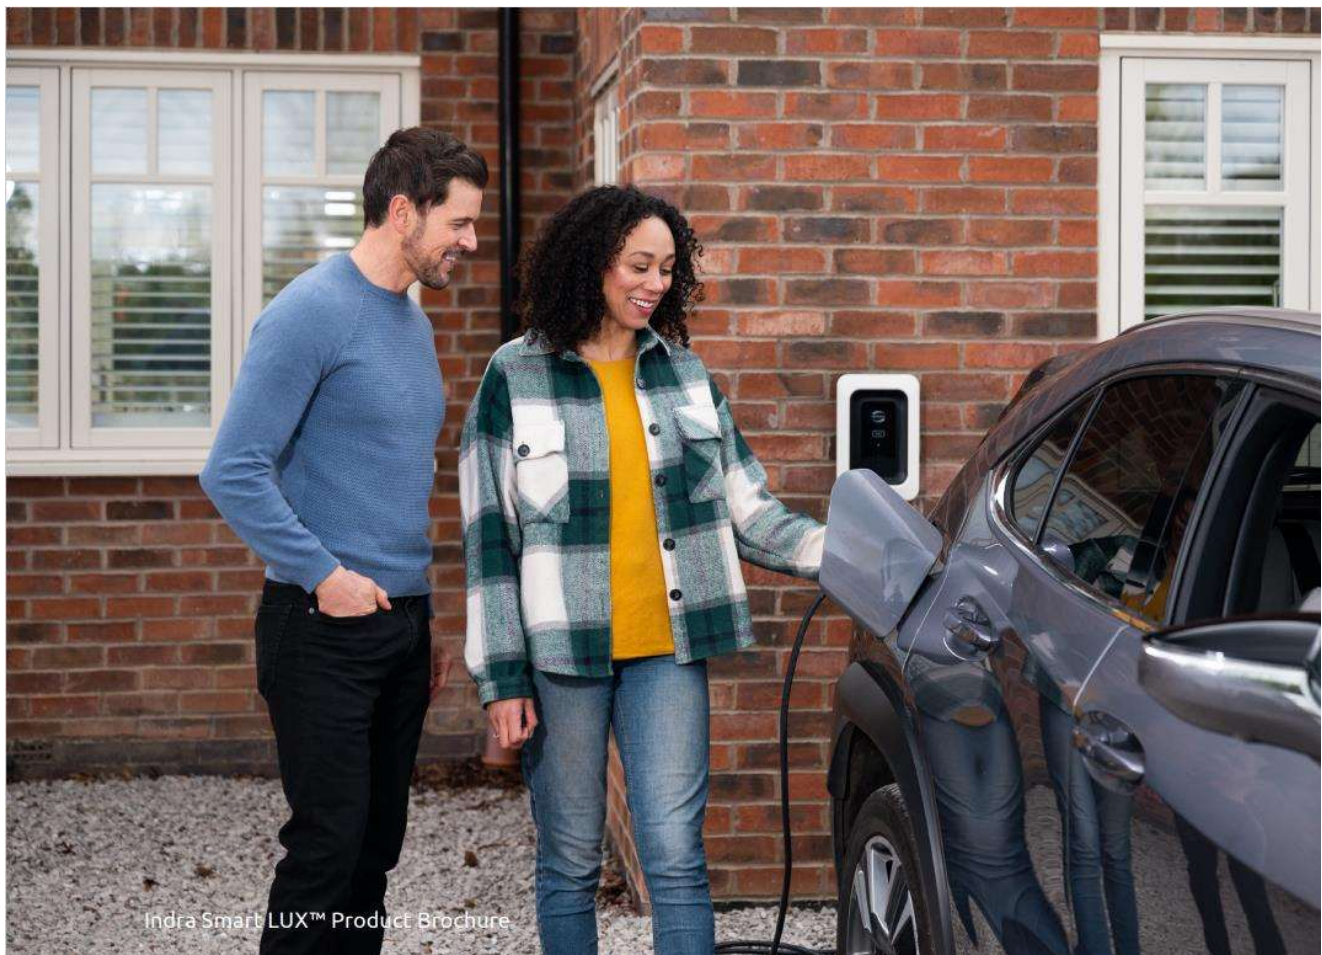

How to make the most of your new Indra Smart LUX™ via the Indra App



Smart Charging

Use the Indra App to set up a recurring charging schedule. Choose regular slots throughout the week, and the charger will automatically start charging during those times, as long as your EV is plugged in, of course.



Solar Power

If you have solar panels installed at home, your charger can be set up to receive power from them. The charger will take any surplus solar power that's above 1.4kW not being used by your home, to charge your EV.



Charging History

View your charging history on the Indra App, review your usage and check if you're charging at the most efficient time.



Using Boost

Plans changed? The Boost feature lets you temporarily override your schedule to start your car charging immediately.




Lock Your Charger

Leaving town? You can put your charger into lock mode via the settings within your Indra App, ensuring total peace of mind.



Optimise Your Energy Tariff

Leaving town? You can put your charger into lock mode via the settings within your Indra App, ensuring total peace of mind.

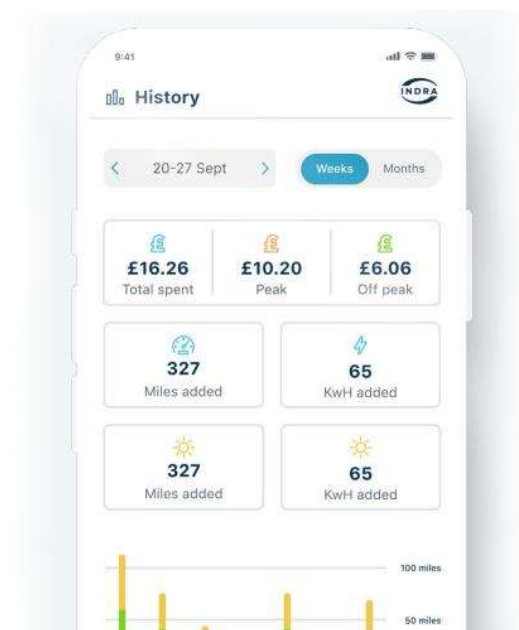

Electrical

Rated power	7.4kW
Charging current	6A-32A variable
Protection	6mA DC leakage detection
Standby consumption	<5W

Mechanical

Dimensions	201mm x 306mm x 78mm (WxHxD)
Weight	4.0kg (with 6m cable)
Operating Temperature	-20°C to +50°C
Enclosure	Polycarbonate, IP67 rated
Impact rating	IK10

Compliance

CE Marked and UKCA	✓
Standards and regulations	The Electric Vehicles (Smart Charge Points) Regulations 2021, BS EN 50581, BS EN 60529, BS EN 61010-1, BS EN 61851-1, IEC 61851-21-2, IEC 61851-22, BS 7671, BS 7671 Amendment 2, G100

You can find out more on the Indra Smart LUX via indra.co.uk
 Or you can contact Indra directly:



Email us
support@indra.co.uk



Call us
 01684 770 631



Online support
www.indra.co.uk/support